

Cable Trays Are Available in FR- UV Polyester & Vinylester Resin System

Standard length :- 3 mtr & 6 mtr

As Per NEMA Loading Standards

Load	Lb/ft.	kgs/ mtr
A	50	74
B	75	111
C	100	148

Support Span : - 8, 10, 12 ft.

- 1

STRAIGHT CABLE TRAY
- 2

VERTICAL INSIDE BEND
- 3

HORIZONTAL DIRECT BEND
- 4


HORIZONTAL RADIUS TEE
- 5

HORIZONTAL RADIUS CROSS
- 6

VERTICAL OUTSIDE BEND
- 7









STRAIGHT REDUCER
- 8

SPLICE PLATE FOR JOINING

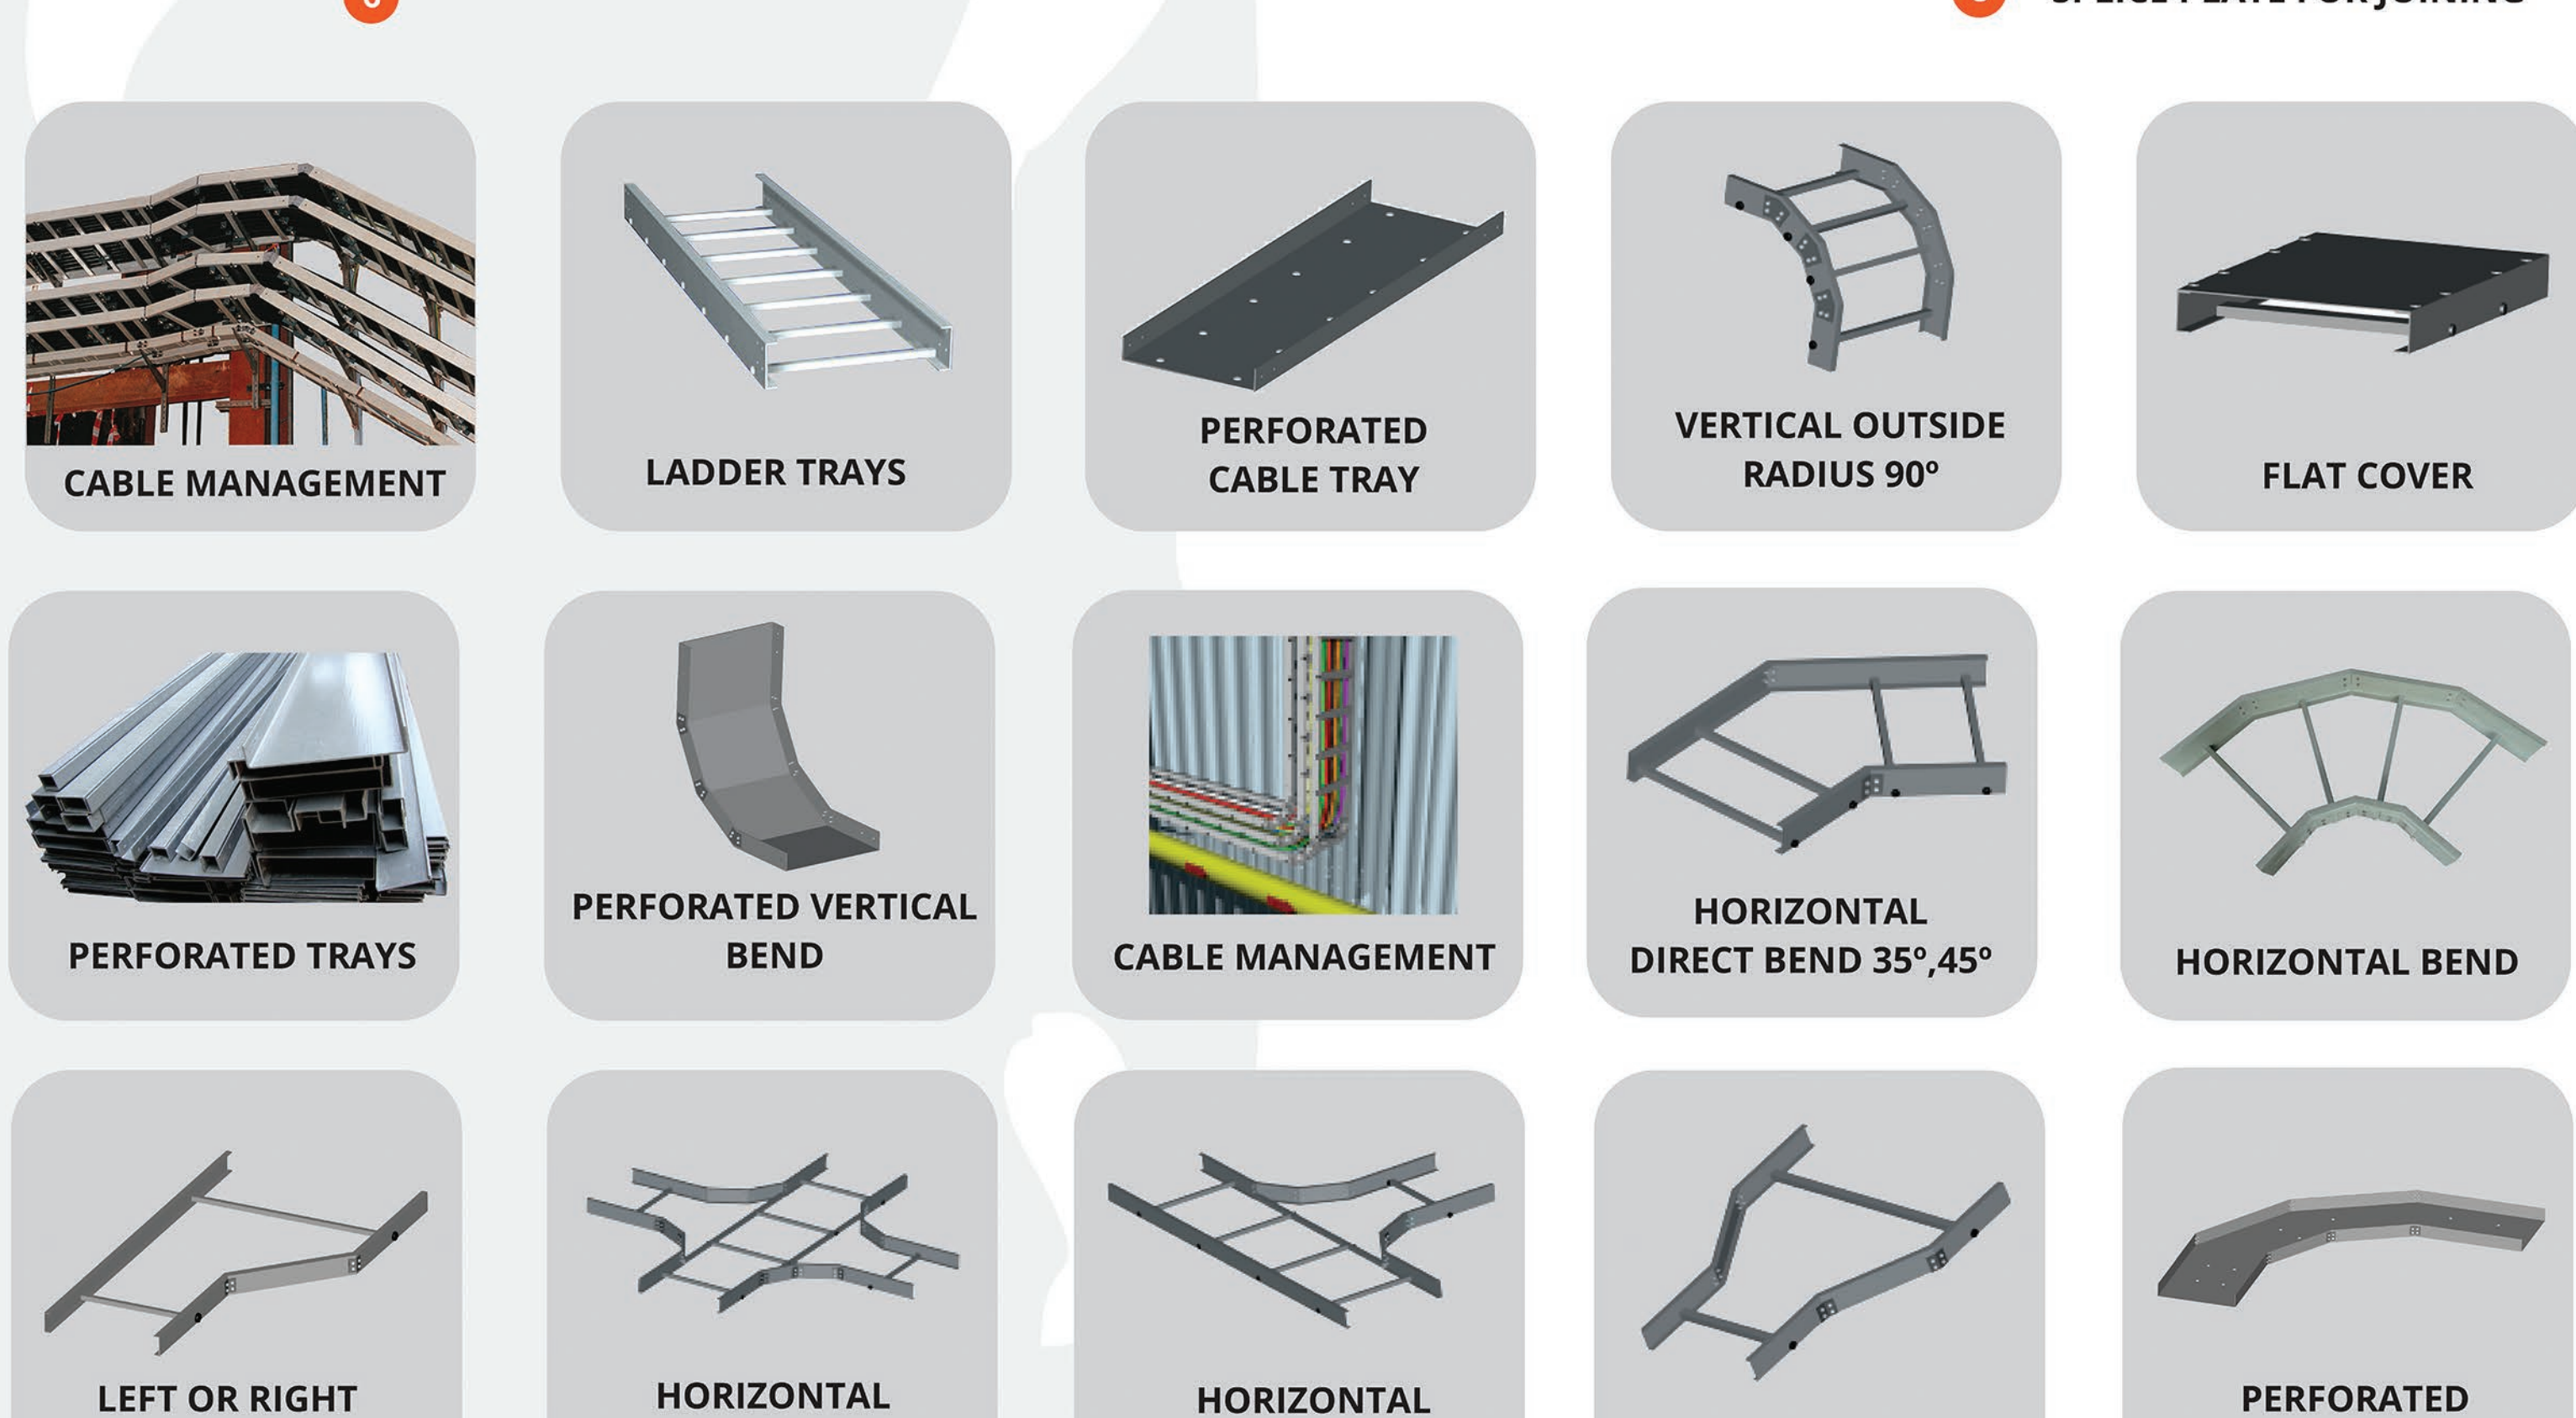




TELESCOPIC ROD

ISOLATOR
ALIGNMENT BLADE

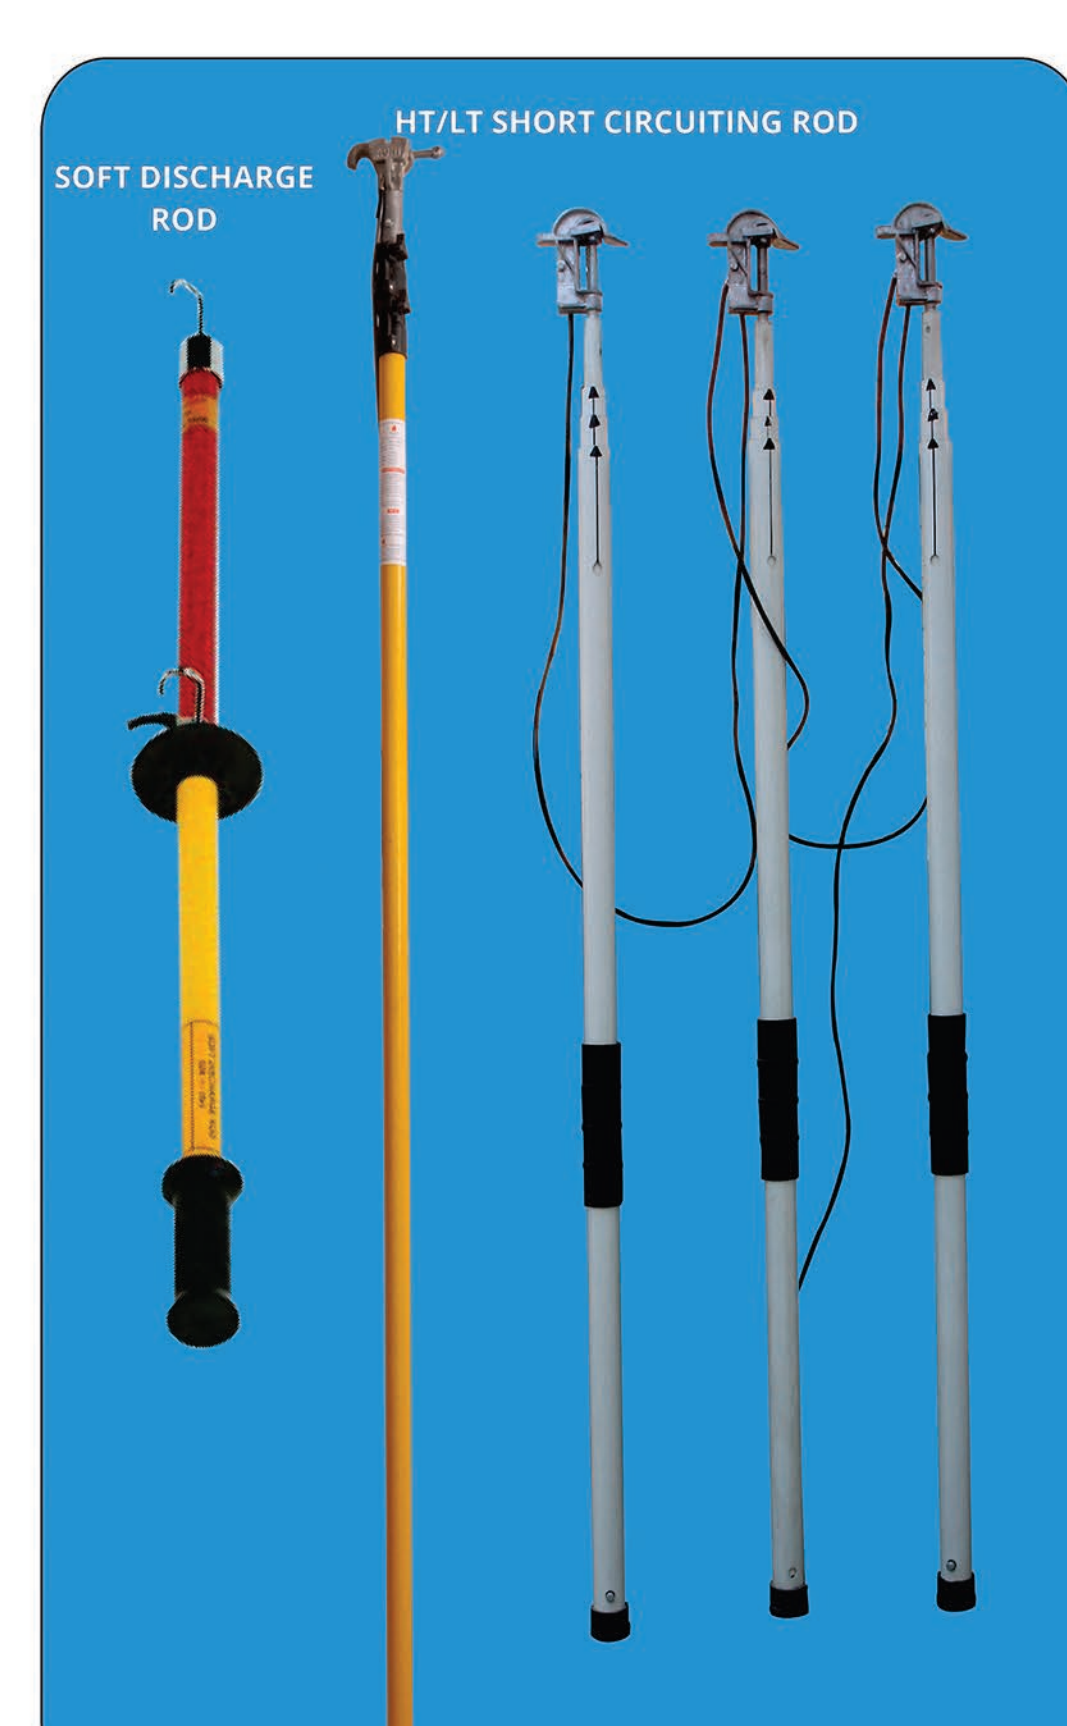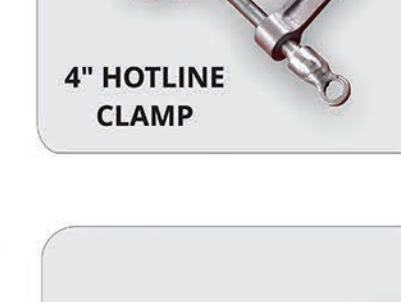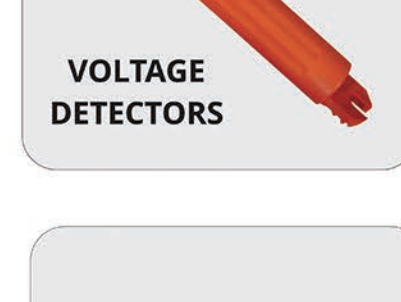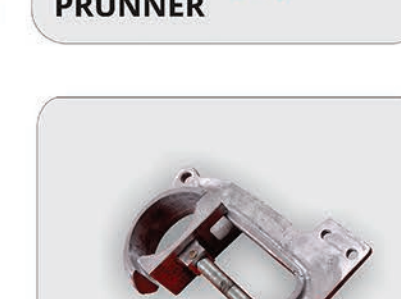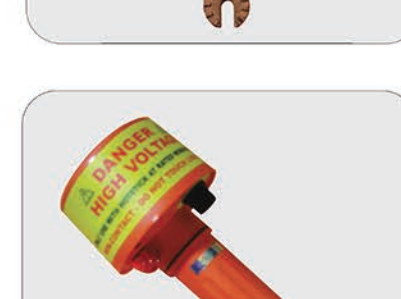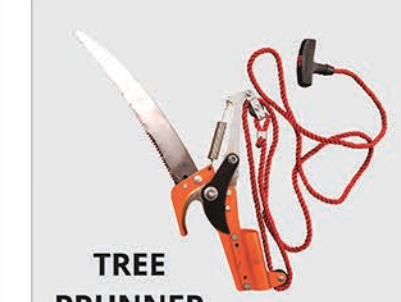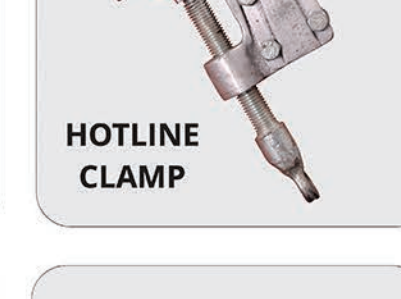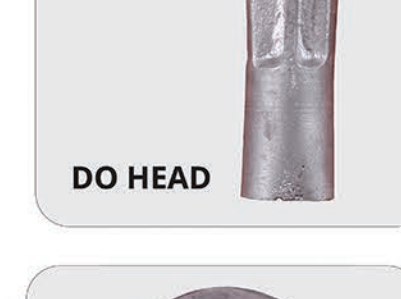

- Agni FRP Telescopic Operating Rod
- Agni Telescopic Earth Discharge Rod
- FRP Telescopic Universal Stick
- Agni Discharge Short Circuiting Rod
- Agni Soft Discharge Rod
- Agni Isolator Blade Alignment On/Off Rod
- Agni Telescopic FRP Tree Pruner / Trimmer

Type tested as per IS 2071 / IEC 60060

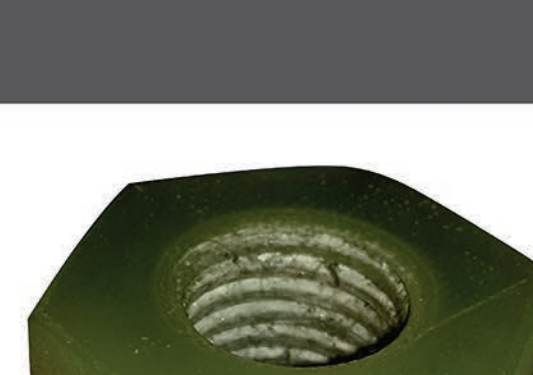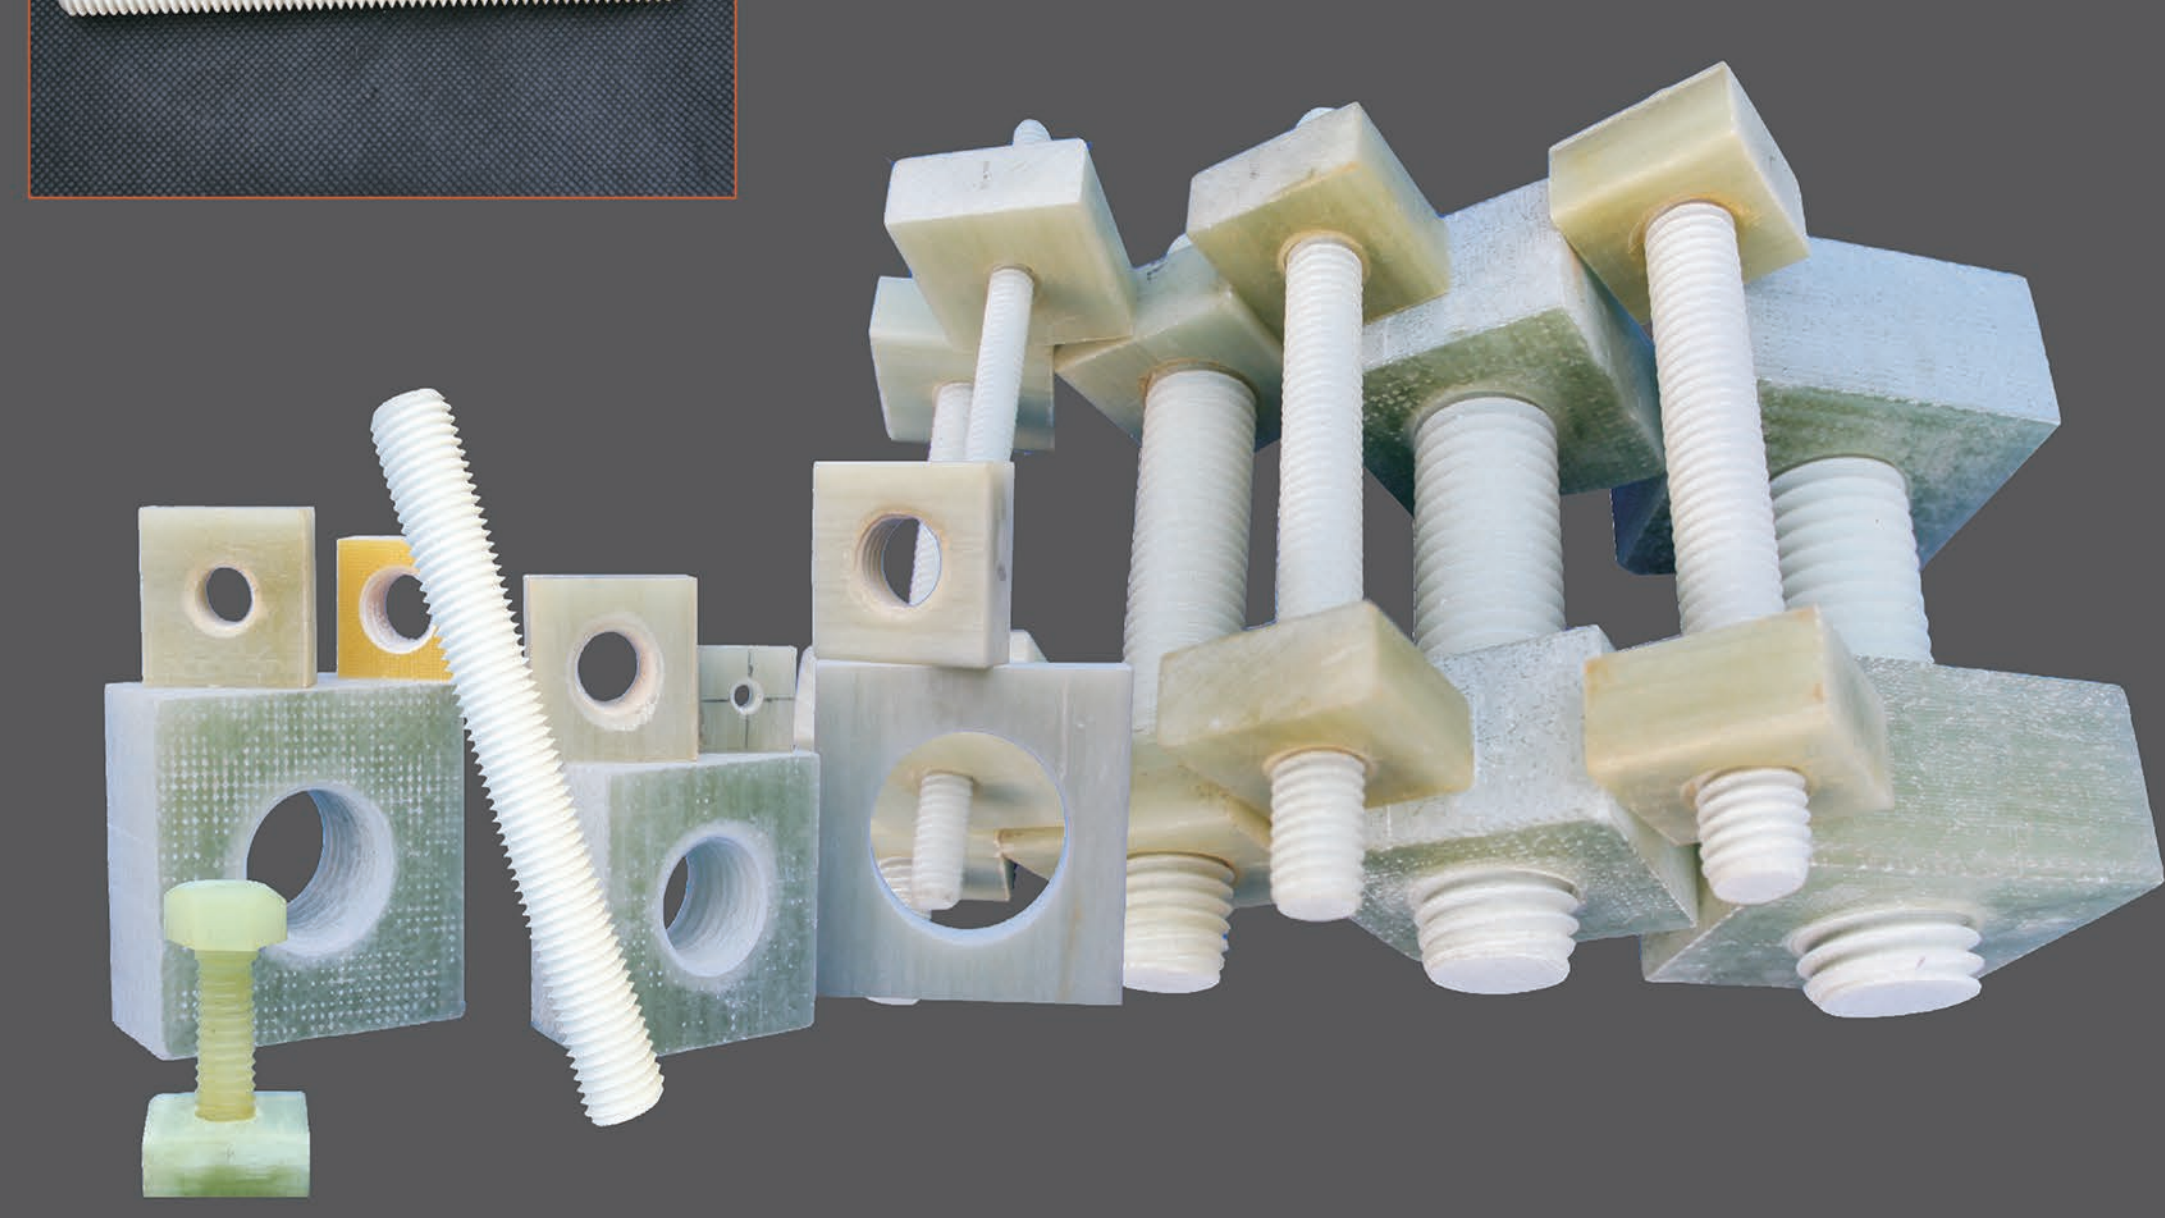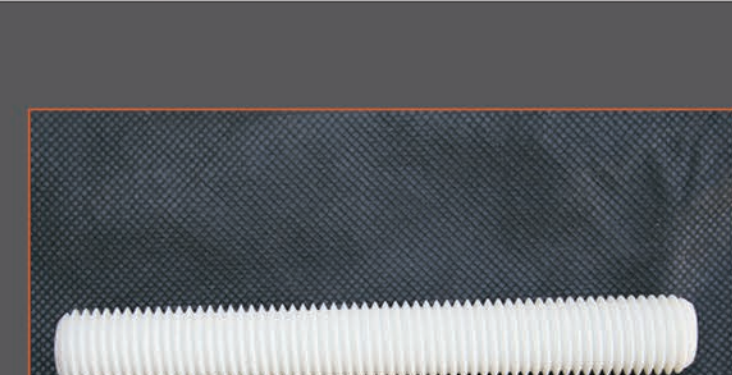

HEX NUT



SQUARE NUT


BOLT

Available Sizes of Threaded Rod



PART NO.	A	L in mm
TROD - 0006	M6	600
TROD - 0008	M8	600
TROD - 0010	M10	1000
TROD - 0012	M12	1000
TROD - 0016	M16	1000
TROD - 0020	M20	1000
TROD - 0024	M24	1000
TROD - 0030	M30	1000

STUD

FRP/GRP FENCING

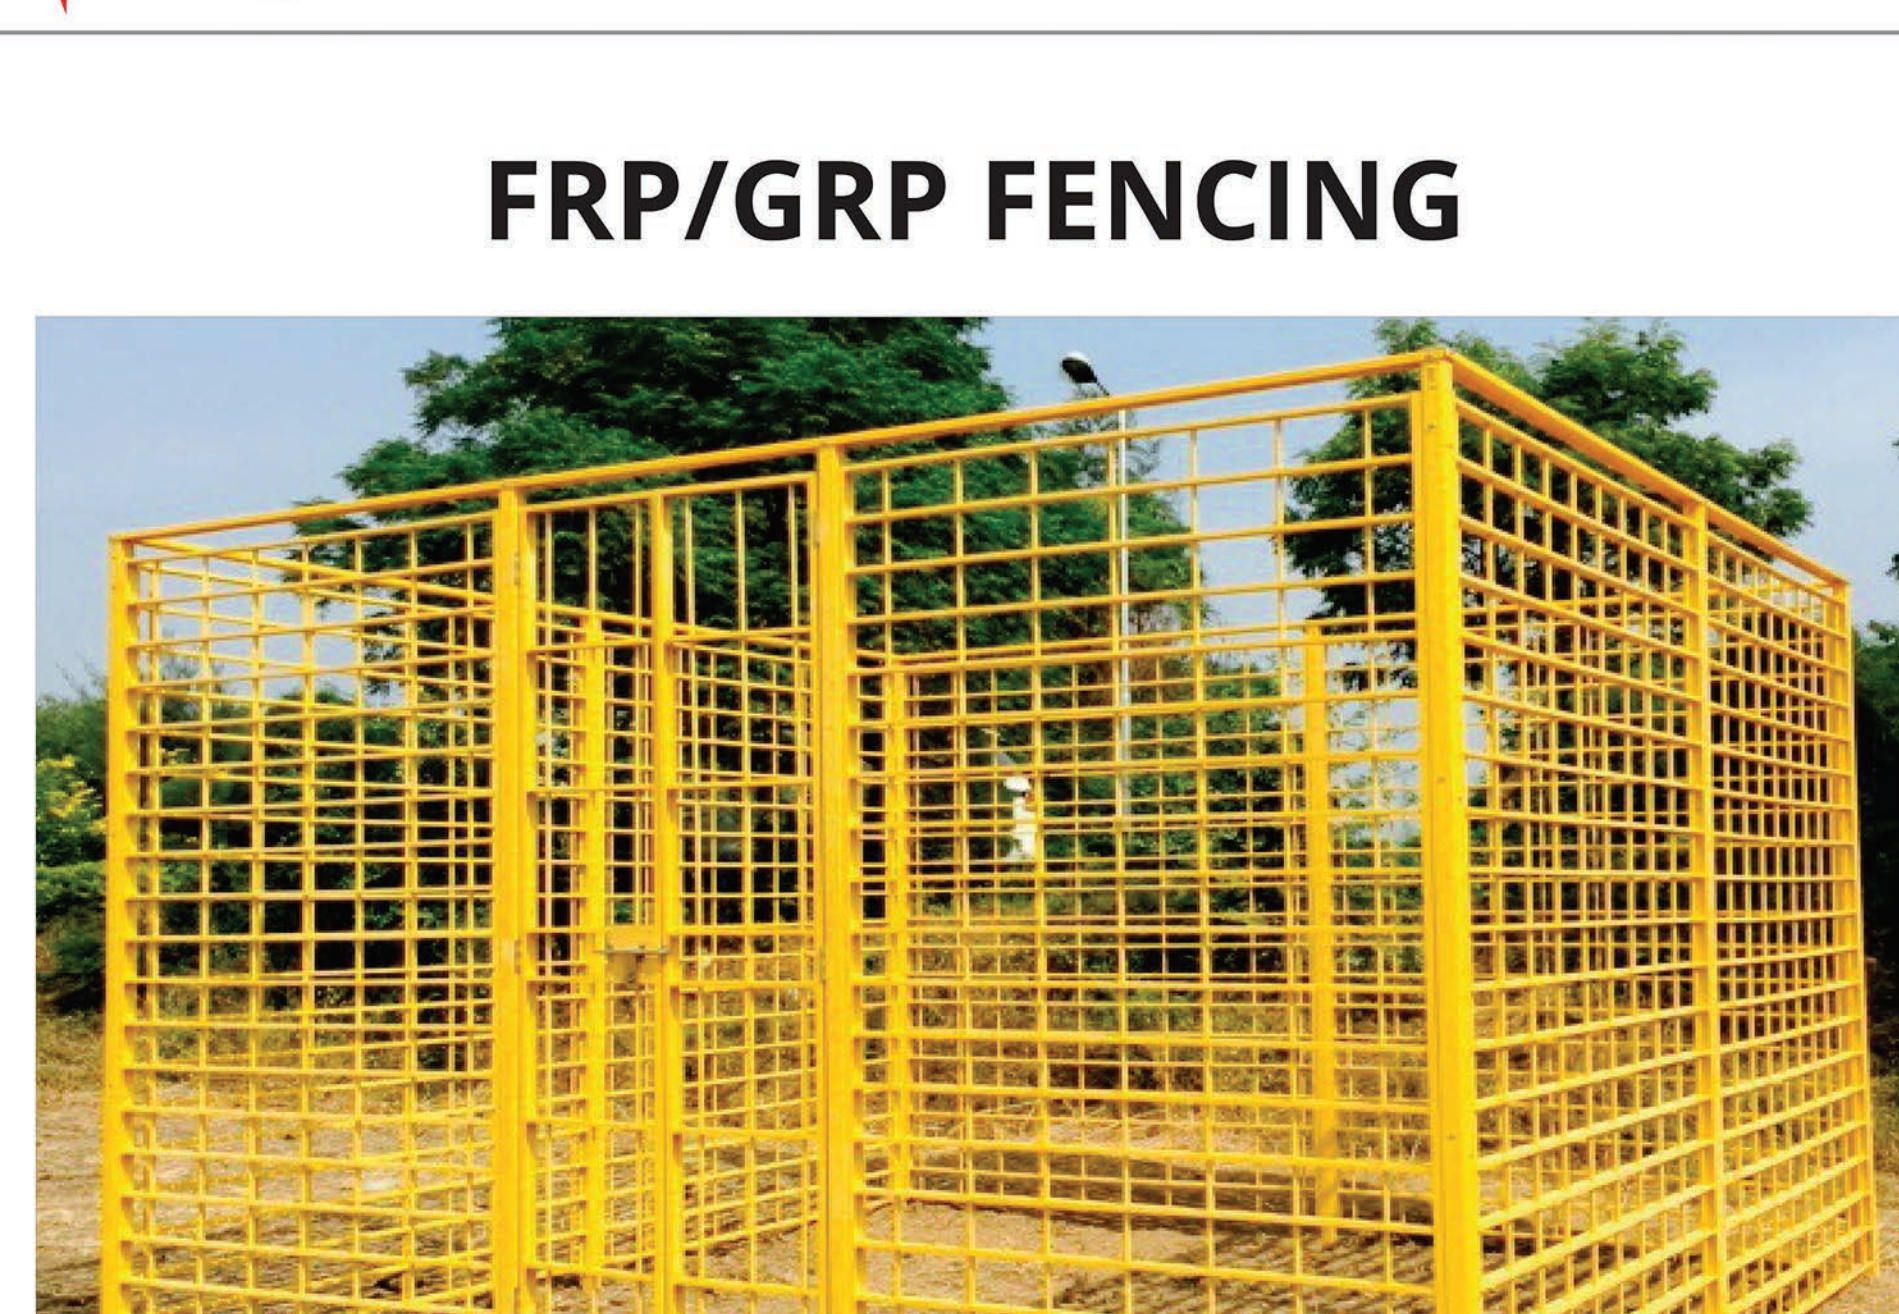

GRP BATTERY STAND

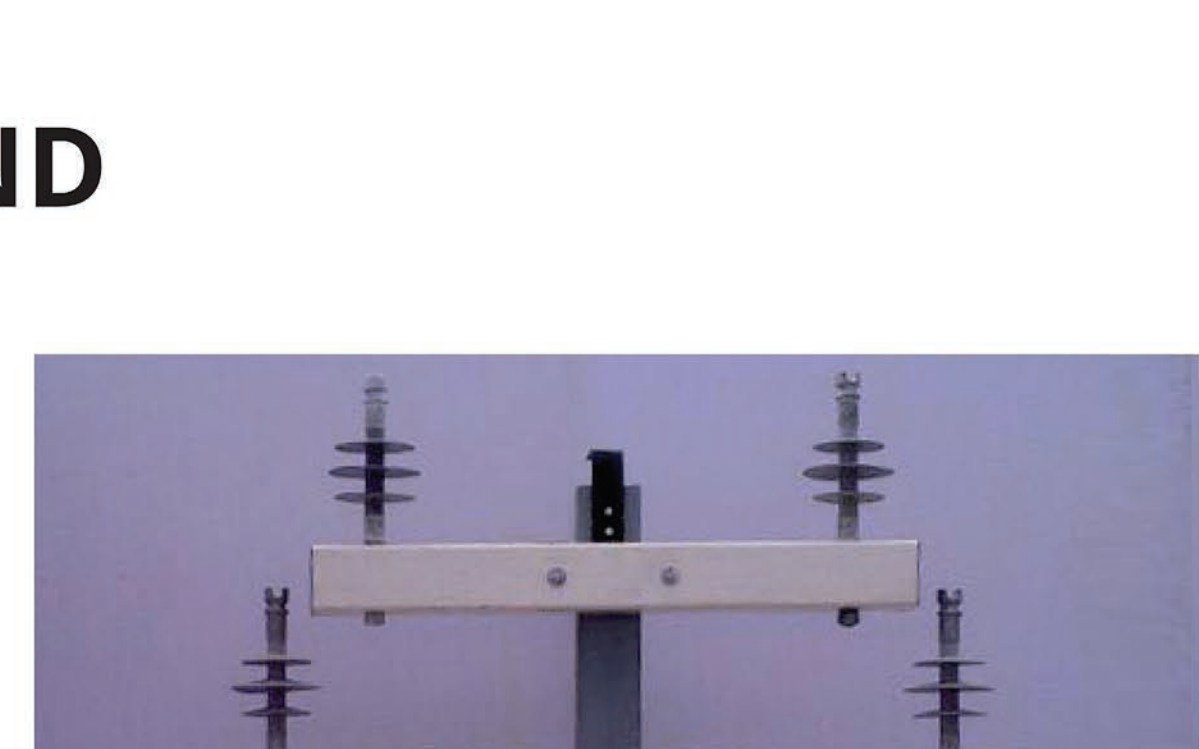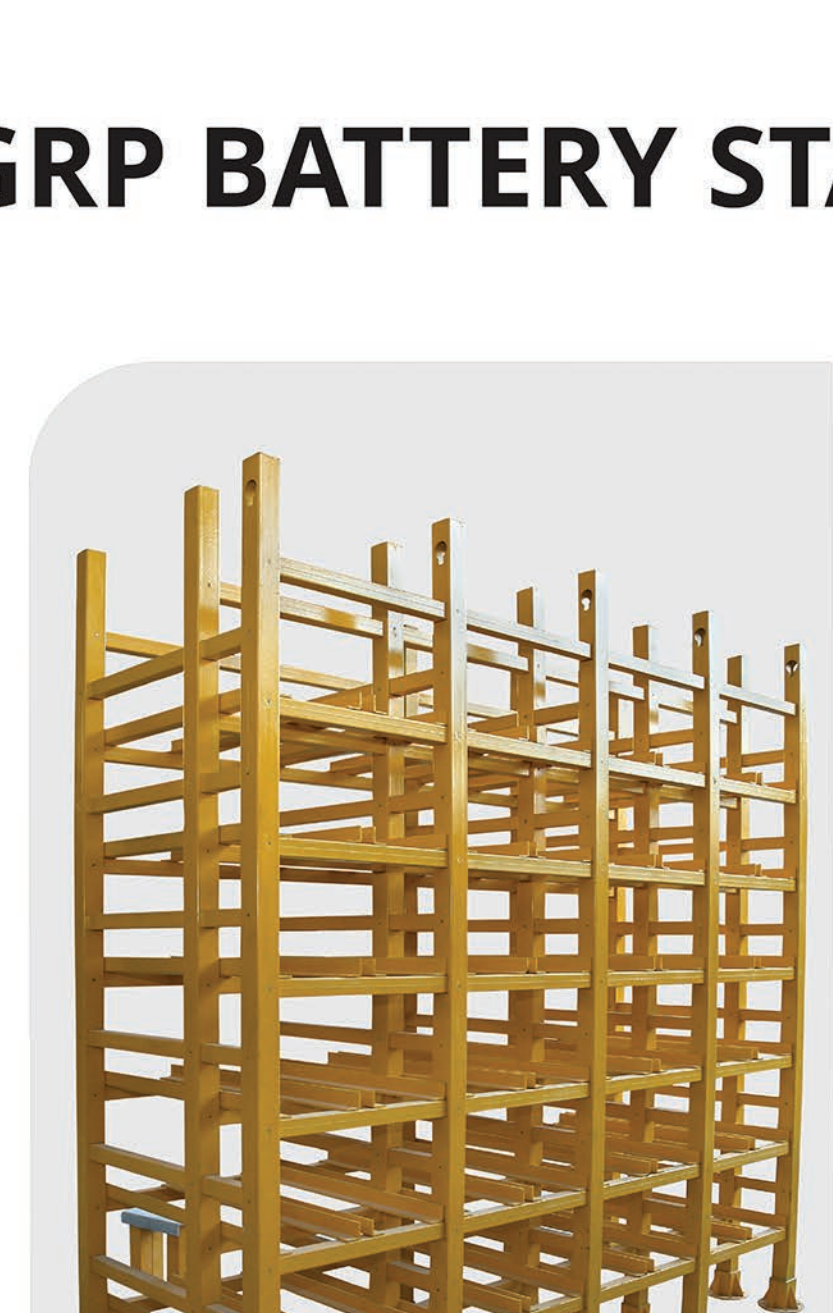

FRP CROSSARM

PRODUCT AS PER IEC62217

BIGGEST MANUFACTURER & SUPPLIER IN INDIA

